


IS210L

2-way Passive Line Array Module

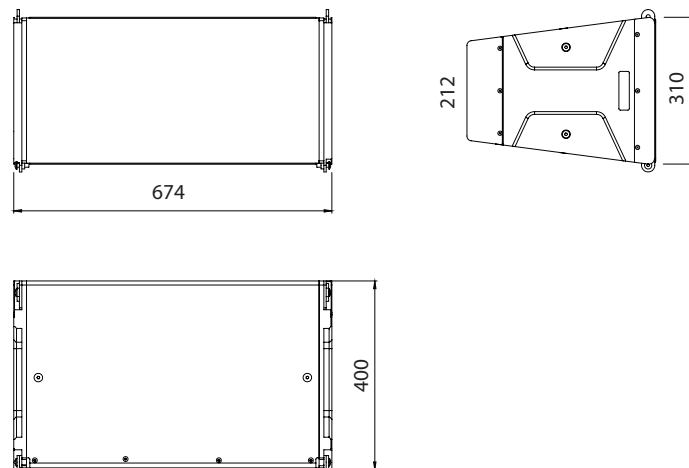

MAIN FEATURES

- High professional acoustic performance
- Premium components
- Touring inspiration
- Maximum configurability in stacking or hanging
- IP55 certification
- Maximum resistance to weather agents
- Available in black or white

DESCRIPTION

IS210L is the first IS line array dedicated to installations. Designed with a symmetrical configuration with 2 10" woofers and a 2.4" driver on a waveguide, it is the first complete passive system bringing the capabilities of a high-quality line array to large environments such as arenas, performing arts center, houses of worship, multifunctional venues, clubs. With a hanging system equipped with hidden and immediate mechanics, the system is easy to configure and has a minimal, elegant, and clean line array design. Protected by a IP55 certification, IS210L is perfect for indoor and outdoor contexts. The variety of its connections allows all installers to benefit from maximum versatility and adaptability.

Speaker Type	2-way Passive Line Array Module
RMS Power	400W (LF: 300W HF: 100W)
Peak Power	800W (LF: 600W HF: 200W)
Usable bandwidth [-10 dB]	57 Hz - 18,700 Hz
Frequency Response [-6 dB]	65 Hz - 17,500 Hz
Impedance	8 Ohm
Sensitivity 1W@m	102.4 dB
Max SPL	133 dB
HF	1x 1.4" (exit), 2.4" v.c.
LF	2x 10", 2.5" v.c.
Dispersion	90x15° [H x V]
X-Over Frequency	900 Hz (internal X-Over)
Connections	Screw terminal block (LF+ LF- HF+ HF-)
Housing	Plywood, water-painted coating
Rigging points	flyable with bracket
IP rating	IP 55
Width	675 mm (26.57 in)
Height	310 mm (12.2 in)
Depth	400 mm (15.75 in)
Weight	29.2 Kg (64 lbs)

ACCESSORIES




DRK-1

Flybar for VIO X206, IS26T, IS210L, VIO S115 or IS115S. White version available



DRK-2

Multiple flybar for VIO X206, IS210L, IS26T or/and VIO S115, IS115S. White version available



LP-6

Link bracket for IS210L speaker and IS115S subwoofer stack or flown mounting