



Dante 4-Channel Audio DSP

500556-V2



Audio



Ethernet



Overview

The Dante 4-Channel Audio DSP (Model 500556-V2) is a product developed for the transmission, routing, and processing of audio signals in Dante networks. It can perform high-quality, low-delay audio transmission, supports 4-way input and output balanced analog channels, and can be powered via PoE from any PoE network switch or via a 12V DC power supply. This processor supports 4-way analog audio signal balance input and output, 4-way Dante digital audio signal input, and the 4-way Dante digital audio signal output. It also features a USB audio card that supports one channel of audio input and one channel of audio output. The device has one of the best DSP algorithms in the industry that includes options such as AEC, AFC, ANC, Ducker, Compressor, Limiter, Mixer and Graphic Equalization among others; In addition, the product provides PC version control software to monitor and operate all the functions on the DSP in an easy and intuitive way.

Applications

- Conference Rooms
- Education
- Retail Stores
- Hotels
- Restaurants
- Conference Center
- Hospitals


Key Features

- Built-in Dante module
- Supports PoE power from PoE network switches or via a 12V DC power supply
- Features 4 balanced inputs and 4 balanced outputs
- Features a USB sound card
- The input supports 48VDC phantom power supply
- DSP processing functions include gain adjustment, stage parameter equalization, compressor, ducker, mixer, graphic equalization, limiter, setting, etc
- Provides software for the Windows platform to manage all audio operations
- API provided for RS232, RS485 and TCP/IP control
- Supports AES67 RTP audio transport

Specification

Analog Audio	4 balanced inputs + 4 balanced outputs
Dante Audio	4 inputs + 4 outputs
USB Sound Card	1 input + 1 output
Analog Maximum Gain	36dB
Quantization Bits	24bit
Sample Rate	48k
Phantom Power	48VDC
Frequency Response	20Hz~20KHz±0.15dB
THD+N	≤0.003% @ 4dBu
Digital/Analog Dynamic Range	114dB
Analog/Digital Dynamic Range	120dB
Input Impedance	20kΩ Balanced, 10kΩ Unbalanced
Output Impedance	100Ω Balanced, 50Ω Unbalanced
Maximum Input Level	+18dBu, Balanced
Maximum Output Level	+18dBu, Balanced
Input Common Mode Rejection	52dB @ 60Hz
Channel Isolation	>100dB
Background Noise	-89dBu
Number of RS485 serial ports	1
Number of RS232 Serial Ports	1
Number of USB sound cards	1
Working Temperature	0°C - 40°C
Working Power Supply	12VDC/PoE power supply
Warranty	2 years
Order Information	500556-V2 Dante 4-Channel Audio DSP (UPC: 627699015568)

Diagram

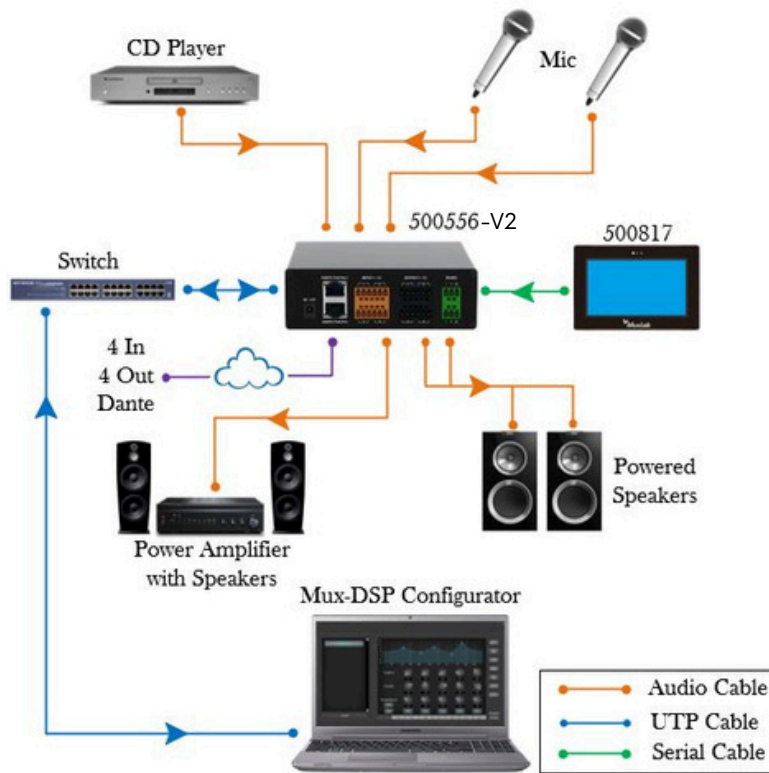

Dante 4-Channel Audio DSP
500556-V2

Follow us: [f](#) [t](#) [in](#) [v](#)

2321 Cohen | St-Laurent, H4R 2N7 | Québec, Canada Tel: 514-905-0588 | Fax:
514-905-0589 | Toll free: 1-877-689-5228 info@muxlab.com |
salesteam@muxlab.com | www.muxlab.com