


# Datasheet

## DRIVEMATE FX

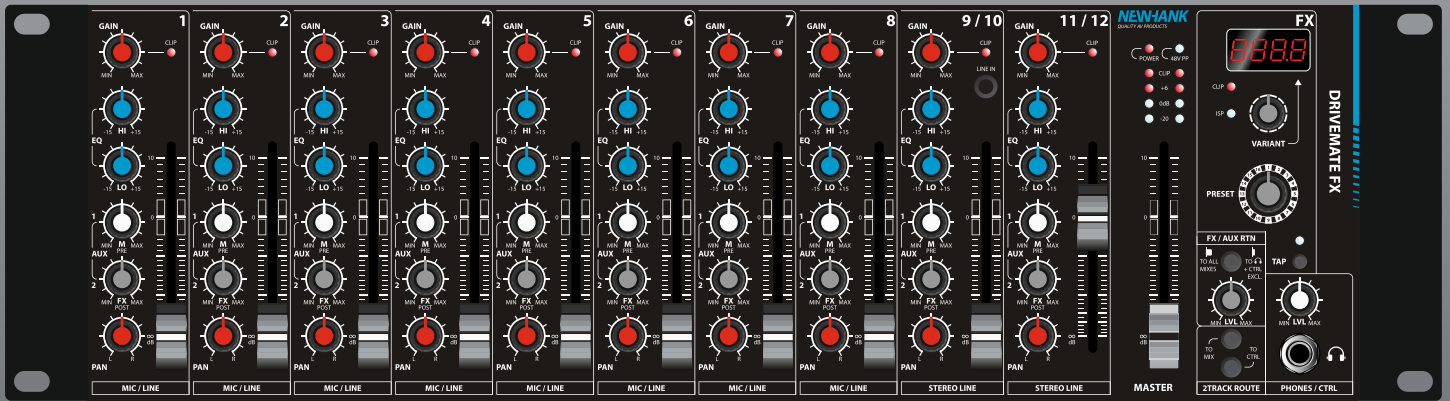

The DRIVEMATE FX is a versatile 12-channel mixer designed for seamless integration into live sound, studio, and fixed installation environments. Its 19" rack-mountable form factor ensures a space-efficient solution without compromising on functionality.

DRIVEMATE FX comes with advanced features like onboard FX processing, flexible routing options, and comprehensive input/output configurations, it is designed to handle diverse audio needs across commercial, educational, and entertainment applications.

Equipped with intuitive controls and rugged construction, it delivers reliable performance while integrating effortlessly into any professional AV setup. Perfect for users who demand quality, flexibility, and precision.



# Datasheet

## DRIVEMATE FX

### Key features

- 12 Channels: 8 Mono Mic/Line with Gain, EQ, Pan, and Level; 2 Stereo for keyboards or media players.
- FX Module: 16 presets like reverb, delay, and chorus with a dedicated FX bus for routing.
- AUX Support: 1 AUX Send for monitors/effects and a stereo AUX Return for external sources.
- Ergonomic Design: Intuitive controls and rugged build for reliable performance.
- Rack-Mountable: Compact 19" design for seamless integration in rack setups.

### Technical specifications

Frequency response (Mic in @20dB)	10Hz - 22kHz +/- 1dB
Signal-to-noise Ratio	> 90dB
THD (Mic in @ -20dB)	0.01%
Preamp Noise (EIN 150Ω source)	< 114dB
Residual Output Noise	< 95dB
CMRR (Max Gain)	> 50dB @ 1kHz
Crosstalk (On adjacent channels)	< 65dB
Power supply	100-250VAC, 50-60Hz
Power consumption	25 Watt
Weight	3,75kg; 8,3lbs
Dimensions	483x133x162mm (19", 3U)
<b>Packaging</b>	
Master carton	2pcs.
Dimensions	535x255x185mm; Master carton: 560x285x390mm.
Weight	4,5kg; 10lbs; Master Carton: 10,2kg; 22.5lbs
<b>General</b>	
Compliance	CE; RoHS
Warranty	2 years limited warranty
EAN Code	8718868408396

For latest product information, visit our website:

[www.newhank.com](http://www.newhank.com)